


The technical dimension of Fiala propellers

(production tolerances 10 %)

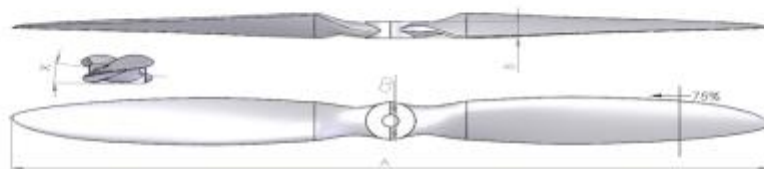

Propeller marking	A	Pitch in mm	X - Pitch angle at 75% of average (in degrees)	C	B	D
15x6	375	150	9,64°	30	15	12
15x8	375	200	12,76°	30	11	12
15x10	375	250	15,81°	30	12	12
15x12	375	300	18,76°	30	15	12
15x14	375	350	21,62°	30	15	12
16x6	400	150	9,05°	30	11	12
16x8	400	200	11,99°	30	14	12
16x10	400	250	14,86°	30	13	12
16x12	400	300	17,67°	30	16	12
16x14	400	350	20,38°	30	18	12
17x6	425	150	8,52°	30	13	12
17x8	425	200	11,30°	33	16	12
17x10	425	250	14,02°	33	17	12
17x12	425	300	16,69°	33	18	12
17x14	425	350	19,27°	33	19	12
18x6	450	150	8,06°	30	12	12
18x8	450	200	10,69°	30	13	12
18x10	450	250	13,27°	30	13	12
18x12	450	300	15,81°	30	15	12
18x14	450	350	18,28°	35	18	12
18,5x6	465	150	7,80°	35	13	12

[Zadejte název dokumentu.]

18,5x8	465	200	10,35°	35	13	12
18,5x10	465	250	12,86°	35	15	12
18,5x12	465	300	15,32°	35	16	12
18,5x14	465	350	17,72°	35	18	12
19x6	475	150	7,64°	35	14,5	12
19x8	475	200	10,14°	35	14	12
19x10	475	250	12,60°	27	14	12
19x12	475	300	15,01°	35	15	12
19x14	475	350	17,37°	35	17	12
20x8	500	200	9,64°	35	15	12
20x10	500	250	11,99°	35	15	12
20x12	500	300	14,29°	34	17	12
20x14	500	350	16,55°	40	18	12
21x8	525	200	9,19°	35	13	12
21x10	525	250	11,43°	35	15	12
21x12	525	300	13,64°	40	20	12
21x14	525	350	15,81°	40	20	12
21x16	525	400	17,93°	35	21	12
22x8	550	200	8,78°	35	15	12
22x10	550	250	10,92°	36	16	12
22x12	550	300	13,04°	42	20	12
22x14	550	350	15,12°	40	20	12
22x16	550	400	17,16°	40	22	12
23x8	575	200	8,40°	36	16	12
23x10	575	250	10,46°	40	17,5	12
23x12	575	300	12,49°	40	18	12
23x14	575	350	14,49°	40	21	12
23x16	575	400	16,46°	40	22	12
24x8	600	200	8,06°	40	16	12
24x10	600	250	10,03°	40	18	12
24x12	600	300	11,99°	40	20	12
24x14	600	350	13,91°	40	20	12
24x16	600	400	15,81°	40	22,5	12
25x8	625	200	7,74°	40	16	12
25x10	625	250	9,64°	36	16	12
25x12	625	300	11,52°	40	20	12
25x14	625	350	13,38°	40	21	12
25x16	625	400	15,20°	40	22	12
26x8	650	200	7,44°	40	17	12
26x10	650	250	9,28°	40	16	12
26x12	650	300	11,09°	40	17	12
26x14	650	350	12,88°	45	19	12
26x16	650	400	14,64°	40	22	12

[Zadejte název dokumentu.]

26x18	650	450	16,38°	40	23	12
27x8	675	200	7,17°	40	16	12
27x10	675	250	8,94°	40	17	12
27x12	675	300	10,69°	46	21,5	12
27x14	675	350	12,42°	46	27	12
27x16	675	400	14,12°	40	24	12
27x18	675	450	15,81°	40	26	12
28x8	700	200	6,92°	40	21	12
28x9	700	225	7,77°	45	20	12
28x10	700	250	8,62°	40	20	12
28x12	700	300	10,31°	43	22	12
28x14	700	350	11,99°	44	23	12
28x16	700	400	13,64°	44	25	12

